(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 July 2005 (28.07.2005)

PCT

(10) International Publication Number
WO 2005/069527 A1

(51) International Patent Classification[7]: H04L 1/00, H03M 13/11

(21) International Application Number: PCT/US2005/000948

(22) International Filing Date: 10 January 2005 (10.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/536,071 12 January 2004 (12.01.2004) US
10/815,133 31 March 2004 (31.03.2004) US

(71) Applicant *(for all designated States except US)*: **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **XIA, Bo** [CN/US]; 102 West Palomino Drive, #218, Chandler, AZ 85225 (US). **JACOBSEN, Eric** [US/US]; 10539 East Salt Bush Drive, Scottsdale, AZ 85259 (US).

(74) Agent: **SCOTT, John, C.**; The Law Offices of John C. Scott, LLC, c/o PortfolioIP, P.O. Box 52050, Minneapolis, MN 55402 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR IMPLEMENTING A LOW DENSITY PARITY CHECK CODE IN A WIRELESS SYSTEM

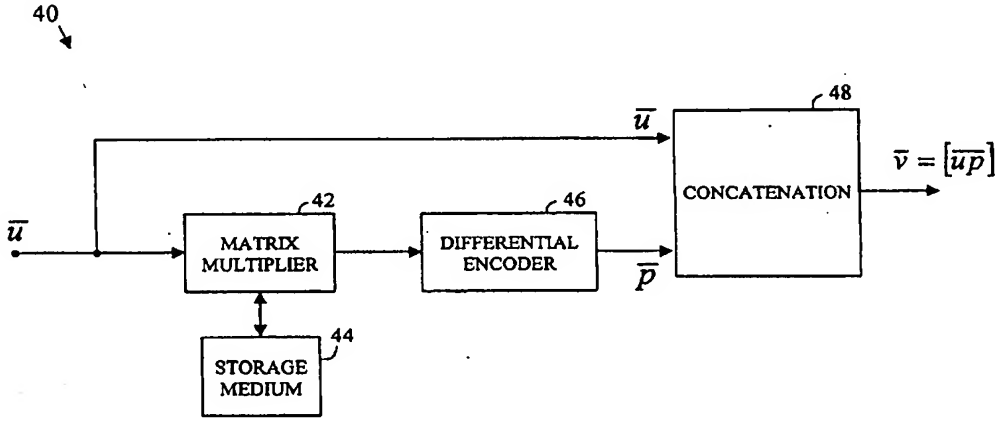

(57) Abstract: A low density parity check (LDPC) code is used within a wireless apparatus to perform forward error correction (FEC) coding. Encoding comprises the multiplication (42) with a transpose of a porti9on (44) of a parity check matrix followed by differential encoding (46). In at least embodiment of the invention, a (2000, 1600) bit-length LDPC code is used.

WO 2005/069527 A1

METHOD AND APPARATUS FOR IMPLEMENTING A LOW DENSITY PARITY CHECK CODE IN A WIRELESS SYSTEM

The present application claims the benefit of U.S. Provisional Application Serial No. 60/536071, filed Jan 12, 2004, entitled "A SYSTEM APPARATUS AND ASSOCIATED METHODS FOR HIGH THROUGHPUT WIRELESS NETWORKING."

TECHNICAL FIELD

The invention relates generally to wireless communications and, more particularly, to error correction coding schemes for use in wireless systems.

BACKGROUND

Wireless channels are often plagued by noise and/or interference effects that can compromise the quality of the communication flowing there through. One strategy for addressing these concerns involves the use of a forward error correction code to encode data before it is transmitted. The forward error correction code adds redundant information to the original data that allows errors in transmission to be corrected after signal reception. Structures and techniques are needed for reliably and efficiently implementing forward error correction in wireless systems.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram illustrating an example wireless network arrangement in accordance with an embodiment of the present invention;

Fig. 2 is a block diagram illustrating an example orthogonal frequency division multiplexing (OFDM) transmitter chain that may be used within a wireless device in accordance with an embodiment of the present invention;

Fig. 3 is a block diagram illustrating an example LDPC encoder in accordance with an embodiment of the present invention;

Fig. 4 is a diagram illustrating a Tanner graph that describes an example LDPC code; and

Fig. 5 is a flowchart illustrating an example method for use in processing data within a wireless device in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

In the following detailed description, reference is made to the accompanying drawings that show, by way of illustration, specific embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention. It is to be understood that the various embodiments of the invention, although different, are not necessarily mutually exclusive. For example, a particular feature, structure, or characteristic described herein in connection with one embodiment may be implemented within other embodiments without departing from the spirit and scope of the invention. In addition, it is to be understood that the location or arrangement of individual elements within each disclosed embodiment may be modified without departing from the spirit and scope of the invention. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims, appropriately interpreted, along with the full range of equivalents to which the claims are entitled. In the drawings, like numerals refer to the same or similar functionality throughout the several views.

Fig. 1 is a block diagram illustrating an example wireless network arrangement 10 in accordance with an embodiment of the present invention. As illustrated, one or more wireless user devices 12, 14, 16 are communicating with a wireless access point (AP) 18 via corresponding wireless links. The AP 18 provides access to a network for the user devices 12, 14, 16 (e.g., a private network, a public network, the Internet, a public switched telephone network, a local area network (LAN), a municipal area network (MAN), a wide area network

(WAN), and/or others). The wireless user devices 12, 14, 16 may include any form of device that may be used to wirelessly access a network including, for example, a laptop, desktop, palmtop, or tablet computer having wireless networking capability, a personal digital assistant (PDA) having wireless networking capability, a cellular telephone or other handheld wireless communicator, a pager, and/or others. The wireless links between the wireless devices 12, 14, 16 and the access point 18 may experience noise and/or various interference effects that can compromise communication quality. To overcome such problems, forward error correction may be used. That is, a forward error correction (FEC) coder may be provided within a transmitting device to encode data before it is wirelessly transmitted. When the signal is received, a FEC decoder may be used to decode the signal. The FEC decoder is capable of detecting and correcting one or more errors in the received data. In this manner, errors caused by noise and/or interference effects in the channel may be overcome. In one aspect of the present invention, a low density parity check (LDPC) code is used as a FEC code within a wireless device.

In at least one embodiment, features of the present invention are implemented within an orthogonal frequency division multiplexing (OFDM) based wireless system. Fig. 2 is a block diagram illustrating an example OFDM transmitter chain 20 that may be used within a wireless device (e.g., a wireless user device, a wireless access point, etc.) in accordance with an embodiment of the present invention. As illustrated, the transmitter chain 20 may include one or more of: a FEC coder 22, a mapper 24, a serial to parallel converter 26, an inverse fast Fourier transform (IFFT) unit 28, a guard interval (GI) addition unit 30, a wireless transmitter 32, and one or more transmit antennas 34. The FEC coder 22 receives user data at an input thereof and encodes the data using a forward error correction code. As will be described in greater detail, in at least one embodiment, the FEC coder 22 may utilize a special form of low density parity check (LDPC) code to perform the coding. The mapper 24 receives code words from the FEC coder 22 and maps the code words based upon a predetermined modulation constellation. Any form of modulation scheme may be used, including, for example, binary phase shift keying (BPSK), quadrature phase shift keying (QPSK), 16 symbol quadrature amplitude modulation (16-QAM), 64 symbol quadrature amplitude modulation (64-QAM), and/or others. The serial to parallel converter 26 transforms a serial stream of modulation symbols output by the mapper 24 into a parallel format for delivery to the IFFT 28. The IFFT 28 performs an inverse fast Fourier transform on the modulation symbols input thereto to

convert the symbols from a frequency domain representation to a time domain representation. Although illustrated as an inverse fast Fourier transform in Fig. 2, it should be understood that any form of inverse discrete Fourier transform may be used in the transmitter chain 20.

The GI addition unit 30 adds a guard interval to the time domain signal representation output by the IFFT 28. Guard intervals are placed in transmitted signals to, among other things, increase the immunity of the signals to, for example, multipath effects in the channel. The wireless transmitter 32 is operative for performing functions such as, for example, up-converting the signal, power amplifying the signal, etc. before transmission. One or more transmit antennas 34 may be provided to facilitate signal transmission into the wireless channel. Any form of antenna(s) may be used including, for example, a dipole, a patch, a helix, an antenna array, and/or others. In at least one embodiment, antenna diversity techniques are implemented. In some other embodiments, multiple input, multiple output (MIMO) techniques are used. Other forms of wireless transducer may alternatively be used instead of antennas (e.g., a infrared (IR) diode in an IR-based wireless system, etc.).

It should be appreciated that the transmitter chain 20 of Fig. 2 is merely illustrative of one possible transmitter architecture that may utilize features of the invention. Many other architectures may alternatively be used. In at least one embodiment, a transmitter chain is used that is configured in accordance with an IEEE 802.11 wireless networking standard (ANSI/IEEE Std 802.11-1999 Edition and its progeny). Other wireless standards may alternatively or additionally be used.

As described above, in at least one embodiment of the invention, the FEC coder 22 may utilize a low density parity check (LDPC) code to perform the forward error correction coding. In a general analysis, an (n,k) LDPC code has k information bits and n coded bits with code rate r = k/n. A parity check matrix H of dimension (n-k)×n may be developed that fully describes the LDPC code. The parity check matrix H defines a set of equations:

$$\bar{v} \cdot H^t = 0 \qquad \text{(Equation 1)}$$

for all code words v of the code, where H^t is the transpose of parity check matrix H. An example parity check matrix H and the corresponding expanded parity check equations are shown below for an LDPC code (9,3):

$$H = \begin{bmatrix} 1 & & & 1 & & & 1 & \\ & 1 & & & 1 & & & 1 \\ & & 1 & & & 1 & & 1 \\ 1 & & & & 1 & & & 1 \\ & 1 & & & & 1 & 1 & \\ & & 1 & 1 & & & & 1 \end{bmatrix} \Leftrightarrow \begin{cases} v_1 + v_4 + v_7 = 0 \\ v_2 + v_5 + v_8 = 0 \\ v_3 + v_6 + v_9 = 0 \\ v_1 + v_5 + v_9 = 0 \\ v_2 + v_6 + v_7 = 0 \\ v_3 + v_4 + v_8 = 0 \end{cases}$$

where v_k represents the bits of the codeword v. LDPC codes may be encoded via a generator matrix G. For a given information vector $\bar{u}$ to be encoded, the corresponding code word $\bar{v}$ may be generated as follows:

$$\bar{v} = \bar{u} \cdot G \qquad \text{(Equation 2)}$$

From equations 1 and 2, it follows that:

$$\bar{u} \cdot G \cdot H^t = 0 \qquad \text{(Equation 3)}$$

Since $\bar{u}$ is an arbitrary vector, the following relationship applies:

$$G \cdot H^t = 0 \qquad \text{(Equation 4)}$$

For a given parity check matrix H, there will typically be 2^k different G matrices that satisfy Equation 4, provided the rank of the H matrix is n-k. One of these generator matrices has the format:

$$G = [I_{k \times k} \mid P_{k \times (n-k)}] \qquad \text{(Equation 5)}$$

where $I_{k \times k}$ is a k×k identity matrix and $P_{k \times (n-k)}$ is a k×n-k matrix. A coder implementing the generator matrix of Equation 5 is known as a systematic encoder since the first k bits of the code word are identical to the k information bits.

The parity check matrix H for an LDPC code may be represented as having two sub-matrices, as follows:

$$H=[H_1|H_2] \qquad \text{(Equation 6)}$$

where sub-matrix H_1 has dimension (n-k)*k and sub-matrix H_2 has dimension (n-k)*(n-k). According to Equation 4, and assuming that H_2 is non-singular, it follows that:

$$I \cdot H_1^{'} + P \cdot H_2^{'} = 0 \Rightarrow P = H_1^{'} H_2^{-1} \qquad \text{(Equation 7)}$$

and the codeword $\bar{v}$ is in the format:

$$\bar{v} = \bar{u} \cdot G = [\bar{u} \mid \bar{u}P] = [\bar{u} \mid \bar{u}H_1^{'} H_2^{-1}] \qquad \text{(Equation 8)}$$

For some LDPC codes, high encoding complexity may arise if a high density H_2^{-1} matrix is used in Equation 8 above. However, in at least one embodiment of the present invention, the sub-matrix H_2 is implemented as $f(D) = 1 + D$, which allows H_2^{-1} to be realized using a well known differential encoder. The encoding process in such an embodiment may be expressed as:

$$\bar{v} = [\bar{u} \mid \bar{u}H_1^{'} H_2^{-1}] = \left[\bar{u} \mid \bar{u}H_1^{'} \frac{1}{1+D}\right] \qquad \text{(Equation 9).}$$

where D is a unit delay.

Fig. 3 is a block diagram illustrating an example LDPC encoder 40 in accordance with an embodiment of the present invention. The LDPC encoder 40 may be implemented as part of, for example, the FEC unit 22 of Fig. 2 or FEC functionality within other wireless devices. As illustrated, the LDPC encoder 40 includes: a matrix multiplier 42, a storage medium 44, a differential encoder 46, and a concatenation unit 48. The storage medium 44 is operative for storing a representation of the sub-matrix H_1 (or the entire parity check matrix H) for use in LDPC encoding. The matrix representation stored on the storage medium 44 may be in conventional matrix form, in list file form (as in Appendix A), in transpose form, or in any other form that is descriptive of the content of the matrix.

Although not shown, the information stored within the storage medium 44 may also be used to perform LDPC decoding within the corresponding wireless apparatus (i.e., during receive operations). Any type of storage medium may be used including, for example, a semiconductor memory, a read only memory (ROM), a random access memory (RAM), an erasable programmable read only memory (EPROM), an electrically erasable programmable read only memory (EEPROM), a flash memory, a magnetic or optical card, a magnetic disk, an optical disk, a CD-ROM, a magneto-optical disk, and/or other forms of machine readable storage. The storage medium 44 may be a dedicated storage unit (e.g., to store only the parity check matrix H, the sub-matrix H_1', etc.) or it may also be used to store other information.

The matrix multiplier 42 receives an information vector $\bar{u}$ at an input thereof. The matrix multiplier 42 then performs a matrix multiplication of the vector $\bar{u}$ and the sub-matrix H_1'. The result of the matrix multiplication is then delivered to the differential encoder 46 which performs a differential encoding operation thereon (i.e., $\frac{1}{1+D}$). The matrix multiplier 42 and the differential encoder 46 may operate independently of one another or their operation may be pipelined (e.g., once a bit is output from the matrix multiplier 42 it is immediately used by the differential encoder 46). The output of the differential encoder 46 is vector $\bar{p}$. The concatenation unit 48 concatenates the original information vector $\bar{u}$ with the vector $\bar{p}$ to generate the codeword $\bar{v}$. The codeword $\bar{v}$ may then be delivered to a next processing stage within a wireless transmitter chain (e.g., mapper 24 in the transmitter chain 20 of Fig. 2).

In at least one embodiment of the present invention, a (2000, 1600) LDPC code is implemented within the transmitter chain of a wireless apparatus. A list file describing a parity check matrix H that is used in one such implementation is set out in Appendix A herein. The list file of Appendix A describes the data within the corresponding parity check matrix. The parity check matrix H of Appendix A (or a portion thereof) may be stored within, for example, the storage medium 44 of Fig. 3. In at least one embodiment, only the portion of the parity check matrix H of Appendix A that corresponds to sub-matrix H_1 (or the transpose thereof) is stored within the storage medium 44 (i.e., the columns having a weight of 4 in the matrix description of Appendix A). The sub-matrix H_1 of the parity check matrix H of Appendix A is relatively low-

density with a uniform column weight of four. The LDPC code corresponding to the matrix *H* of Appendix A has been designed to provide good performance with variable-length data blocks, while still achieving a manageable implementation complexity. The codeword length has been selected to provide a good tradeoff between performance and complexity for use in wireless (and some wireline) applications. It should be appreciated that small variations may be made to the parity check matrix *H* of Appendix A with little or no degradation in performance. As used herein, a matrix is "substantially as described in the list file of Appendix A" if the matrix is the same as the matrix described in Appendix A or the matrix varies from the matrix described in Appendix A in a manner that produces little or no degradation in performance.

It should be understood that the parity check matrix *H* described in Appendix A is merely one example of a parity check matrix that may be used in accordance with embodiments of the present invention. In other embodiments, other parity check matrices may be used.

As described above, the parity check matrix *H* of Appendix A is described using a list file. This method of matrix description will be discussed below. A parity check matrix H will typically include ones and zeros in locations throughout the matrix. The list file of Appendix A describes the locations of these one and zeros for the subject matrix. A full definition of an LDPC code can be accomplished through identification of the locations of the "edges" between the "variable nodes" (codeword bits) and "check nodes" (parity relationships). Fig. 4 is a diagram illustrating a Tanner graph 50 that describes an example LDPC code. The Tanner graph 50 illustrates the arrangement of the check nodes 52, the variable nodes 54, and the "edges" 56 connecting them for the corresponding code. The codeword is made up of the bits represented by the variable nodes 54. For the code of Fig. 4, each codeword has ten bits. Each check node 52 represents a parity relationship between the codeword bits represented by the variable nodes 54 connected to it by the edges 56. The number of edges 56 connected to a check node 52 is called the "degree" of the check node 52. Likewise, the number of edges 56 connected to a variable node 54 is called the "degree" of the variable node 54. For the illustrated code, all check nodes 52 are of degree eighteen, all variable nodes 54 related to the systematic information bits are of degree four, and all variable nodes 54 corresponding to parity bits are of degree two, except for the last, which is of degree one.

Since the organization of the edges in LDPC codes appears random, the edge locations must be explicitly defined by means of a list. A straightforward means of describing a code by means of such a list follows. The matrix $H = [H_1\ H_2]$ comprises a regular matrix H_1 with constant column weight 4 and a weight-2 lower-triangular-inverse matrix H_2 for efficient encoding purposes. An LDPC code list file may contain three parts to fully describe a parity check matrix H (i.e., all of the ones of the matrix): (a) matrix size (column, row); (b) column weights (number of ones) of each column; and (c) locations of ones in each column. It should be noted that the convention for the indices is zero-based, with the index of the first element of each column being zero. An example H matrix for a (9,3) LDPC code follows:

$$H = \begin{bmatrix} 1 & 0 & 0 & 1 & 0 & 0 & 1 & 0 & 0 \\ 0 & 1 & 0 & 0 & 1 & 0 & 0 & 1 & 0 \\ 0 & 0 & 1 & 0 & 0 & 1 & 0 & 0 & 1 \\ 1 & 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 & 1 & 0 & 1 & 0 & 0 \end{bmatrix}$$

and the corresponding list file is:

```
9 6
2 2 2 2 2 2 2 2 2
0 3
1 4
2 5
0 4
1 5
2 3
0 5
1 3
2 4
```

The list file set out in Appendix A for the (2000, 1600) LDPC code follows the same basic

approach.

Fig. 5 is a flowchart illustrating an example method 60 for use in processing data within a wireless device in accordance with an embodiment of the present invention. Input data is first matrix multiplied by a transpose of a first portion (i.e., H_1^t) of a parity check matrix H (block 62). The parity check matrix H (or some portion thereof) may be stored within a storage medium of the wireless device. In at least one embodiment, the parity check matrix H described in Appendix A is used. A result of the matrix multiplication may then be processed by a differential encoder to generate coded data (block 64). The original input data and the coded data are then concatenated to form a code word (block 66). A wireless signal is subsequently generated and transmitted that includes the code word (block 68). Other code words may also be part of the transmission. In at least one embodiment, the wireless signal is an orthogonal frequency division multiplexing (OFDM) signal. In at least one implementation, the method 60 of Fig. 5 (or a variant thereof) is embodied as a plurality of instructions stored on a machine readable storage medium that may be executed by a digital processing device.

The inventive techniques and structures may be used in any of a wide variety of different wireless devices, components, and systems. For example, in various embodiments, features of the invention may be implemented within laptop, desktop, palmtop, and/or tablet computers having wireless networking functionality, personal digital assistants (PDAs) having wireless networking functionality, cellular telephones and other handheld wireless communicators, pagers, satellite communication devices, devices for use in point to point wireless links, devices for use in local multipoint distribution systems (LMDS) and/or multi-channel multipoint distribution services (MMDS), wireless network interface cards (NICs) and other network interface structures, integrated circuits, and/or other devices.

In the foregoing detailed description, various features of the invention are grouped together in one or more individual embodiments for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting an intention that the claimed invention requires more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive aspects may lie in less than all features of each disclosed embodiment.

Although the present invention has been described in conjunction with certain embodiments, it is to be understood that modifications and variations may be resorted to

without departing from the spirit and scope of the invention as those skilled in the art readily understand. Such modifications and variations are considered to be within the purview and scope of the invention and the appended claims.

APPENDIX A

The list file for an example (2000, 1600) LDPC code is set out below:

```
2000 400

4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 1
```

143 225 316 323
92 140 191 358
69 315 329 343
6 121 205 284
58 66 254 337
1 47 178 395
129 151 212 228
66 146 243 265
22 140 157 180
120 208 313 321
290 350 370 382
56 94 184 215
84 119 337 344
2 156 244 398
9 106 200 336
22 37 150 270
3 110 326 367
235 276 290 335
82 187 193 297
43 183 297 379
194 239 243 293
90 144 228 350
170 206 321 395
72 138 254 300
25 196 201 279
56 59 362 379
28 121 170 277
61 273 351 386
71 76 232 328
62 109 190 201
111 162 190 227
189 272 288 302
14 49 147 334
33 53 213 238
53 219 368 379
126 149 188 339
108 118 182 393
0 37 160 295
158 200 335 356
11 20 229 397
77 86 212 250
79 193 262 336
43 104 125 376
55 114 134 293
240 283 299 333
0 24 57 100
46 84 322 341
5 43 45 221
29 217 274 301
81 93 116 278
93 174 213 231
64 201 251 385
76 134 278 370
71 93 182 398
38 174 250 377
19 116 357 372
81 91 164 307
180 186 241 251
239 254 331 342
107 149 250 295
73 221 295 362
75 97 242 279
32 197 244 313
245 248 276 296
59 230 322 347
17 246 291 364
125 157 227 390
122 205 279 348
61 298 340 380
12 31 256 328
119 163 178 217
61 129 185 200
34 38 104 295
119 289 349 377
50 314 322 367
28 48 248 382
32 41 128 201
91 115 220 368
45 151 196 265
152 190 198 317
157 212 242 275
2 40 249 283
195 280 299 345
142 151 220 395
70 121 252 382
52 244 279 297
22 131 256 349
47 52 339 346
50 288 342 388
26 87 247 283
67 127 132 136
146 264 321 323
210 275 319 346
57 160 252 261
26 54 170 197
120 218 229 341
44 53 124 323
0 113 315 358
110 144 246 298
89 91 99 346
21 32 216 393
37 170 209 342
49 58 357 399
18 23 31 373
159 172 195 366
213 335 337 378
1 103 159 277
96 159 209 387
102 165 234 378
173 245 356 376
57 230 240 314
1 89 153 166
25 32 264 342
265 276 321 324
57 211 274 360
12 291 311 348
34 220 258 282
52 58 109 379
116 248 337 369
87 146 183 278
42 96 318 361
32 176 312 361
69 258 310 389
1 84 182 300
45 124 161 396
15 76 99 101
62 248 354 375
78 258 262 311
181 265 364 368
60 168 227 254
162 231 270 377
14 102 139 158
28 79 155 318
28 40 63 236
163 181 258 279
158 176 273 334
80 236 256 380
74 156 214 358
176 229 251 283
19 104 114 162
141 284 291 358
77 123 157 361
141 154 215 338
55 294 296 298
80 109 272 364
43 206 287 363
81 175 206 261
31 94 275 317
10 123 141 279
44 64 157 270
160 243 290 373
39 217 262 324
19 185 312 389
211 271 277 291
19 148 155 324
24 94 124 314
3 85 193 349
68 175 202 253
139 160 337 377
21 224 249 398
113 122 206 327
7 10 156 245
140 182 192 235
161 291 324 387
31 232 237 350
30 184 235 387
136 226 269 327
4 93 136 167
47 148 309 348
73 225 252 290
44 213 361 386

79 319 361 381
74 251 339 356
100 105 246 293
68 101 191 285
32 103 323 355
122 188 228 305
6 77 291 397
70 76 259 276
72 270 335 348
93 147 255 312
92 112 259 388
9 18 61 308
3 137 139 257
165 217 345 354
78 134 263 280
186 213 227 303
68 194 294 346
35 225 284 312
117 188 340 346
258 299 306 331
83 194 207 349
43 141 175 329
0 68 170 262
25 36 153 309
57 62 273 323
7 19 75 264
21 254 259 366
8 97 156 172
9 185 313 330
55 219 253 393
86 120 185 233
41 136 191 242
194 265 303 393
256 285 310 399
103 247 275 378
115 218 225 285
98 196 217 328
177 267 306 350
82 299 320 395
139 251 364 381
42 118 178 194
73 100 198 286
68 249 292 376
13 216 221 256
127 138 177 398
20 69 239 264
3 126 132 163
66 88 169 271
88 197 201 387
1 51 135 149
257 294 331 356
204 260 288 294
45 144 185 383
173 310 329 362
15 165 305 348
27 66 85 182
47 235 238 246
230 276 293 367

118 150 267 324
68 82 309 398
72 154 226 231
76 135 151 384
39 48 80 309
0 178 305 353
88 136 196 321
37 95 222 300
23 343 358 369
195 252 303 349
9 81 102 317
20 219 285 316
219 281 304 354
33 121 319 351
21 157 191 260
0 88 303 307
13 23 62 268
13 173 279 320
117 189 253 392
32 40 57 350
57 123 148 368
18 96 164 326
84 103 107 359
92 338 350 355
16 70 242 338
20 74 141 179
159 246 248 365
207 292 387 399
38 148 303 347
68 113 296 389
12 257 286 325
50 287 294 327
149 259 356 367
3 12 178 309
63 92 166 368
97 190 199 363
13 86 92 308
132 141 221 322
213 257 348 396
91 147 294 325
14 27 48 222
11 81 110 360
10 50 357 393
35 89 248 252
6 55 319 345
107 116 223 271
168 240 261 384
54 204 295 351
3 51 146 299
74 184 307 361
9 202 272 387
106 198 281 329
36 105 225 236
90 139 183 299
152 160 292 354
11 115 227 236
152 202 211 373
4 173 346 374

132 197 238 279
16 94 150 222
241 344 375 386
31 121 161 231
9 33 197 350
87 197 233 312
100 111 129 368
184 278 289 346
76 177 227 356
11 132 246 314
46 93 103 309
20 33 64 196
111 134 194 204
76 116 140 238
189 298 326 381
235 317 320 333
127 301 348 376
51 286 309 377
17 70 139 187
54 180 184 344
85 311 318 327
263 312 364 369
97 149 198 336
31 141 151 285
72 163 187 311
24 54 249 297
64 143 322 360
53 73 122 256
100 138 214 226
265 348 373 378
42 62 113 174
29 313 349 358
154 179 217 268
164 289 380 392
109 165 236 312
92 141 193 238
190 243 267 275
95 143 203 393
130 213 264 308
102 133 217 226
69 88 116 295
108 217 273 322
26 287 306 343
8 18 136 152
110 240 245 334
225 255 278 310
63 168 170 303
8 17 255 314
28 92 98 200
112 201 244 392
134 216 344 383
21 97 115 396
28 69 120 380
34 259 267 314
55 72 87 223
43 180 185 252
23 113 133 277
258 285 347 350

246 253 318 399
12 78 90 369
17 93 96 102
109 162 318 360
22 83 151 290
141 191 240 266
25 90 138 390
81 113 265 382
88 142 210 283
10 40 43 140
2 195 268 328
117 240 257 374
298 332 350 365
60 122 240 313
157 215 274 397
11 41 164 274
67 76 92 104
19 192 305 344
23 35 125 224
152 163 352 385
40 161 165 329
113 215 245 378
80 168 262 382
81 136 165 239
2 42 248 323
111 127 157 330
79 125 239 341
147 172 187 397
230 245 277 352
49 202 350 381
34 56 167 242
36 58 61 83
107 110 133 251
100 245 295 330
16 71 175 397
106 206 229 236
177 308 371 387
89 122 207 362
3 166 190 305
155 171 289 336
34 37 293 301
143 189 255 338
38 75 137 166
62 92 124 366
73 83 105 136
69 134 200 366
179 324 366 386
72 82 188 192
100 120 189 375
244 252 318 329
3 105 116 203
280 282 288 365
38 196 330 369
20 31 113 381
56 173 205 390
2 30 165 366
41 75 169 302
210 271 330 334

60 109 199 348
27 89 214 388
77 79 83 289
119 236 323 383
1 44 271 372
25 42 104 215
144 153 357 362
133 153 273 383
152 174 269 355
107 193 210 320
194 298 317 331
22 112 139 222
147 152 221 365
20 48 130 353
58 100 125 172
79 181 242 313
174 254 304 321
70 129 283 385
18 79 296 345
14 25 34 52
31 88 212 226
26 53 123 165
101 108 248 328
49 115 190 395
23 119 139 282
27 206 209 324
203 221 332 356
181 190 288 379
38 73 249 368
45 49 264 394
89 112 218 316
144 186 297 343
152 177 233 237
74 171 223 334
4 16 44 89
103 165 177 358
53 217 342 383
58 88 126 370
4 214 243 383
5 96 155 354
7 61 214 237
90 241 261 367
39 161 202 206
101 132 135 250
117 191 213 352
132 233 270 303
16 251 266 370
41 45 60 99
182 197 276 331
40 257 262 322
148 208 332 352
127 159 253 290
273 289 325 341
95 145 231 297
70 110 225 313
50 112 166 302
68 97 128 218
90 264 269 280

22 132 258 368
65 124 129 325
95 105 111 385
109 233 250 302
8 33 80 318
51 253 281 288
209 237 346 391
12 198 221 269
9 141 229 306
0 114 219 300
242 289 318 335
41 90 163 215
65 80 99 167
269 296 303 356
45 106 232 346
86 195 293 391
140 193 245 321
88 150 183 380
230 253 315 373
53 184 258 263
17 79 261 286
94 293 302 397
170 218 358 376
61 246 287 292
61 162 245 303
25 286 333 355
159 241 263 354
134 186 305 327
33 38 283 301
17 44 159 398
108 167 174 374
90 105 172 257
93 165 180 353
137 289 296 386
241 273 276 359
44 94 211 286
166 184 204 226
98 281 357 389
41 107 187 298
19 47 379 399
1 16 272 296
107 203 283 322
77 245 266 390
29 166 345 364
61 229 356 361
70 105 229 250
268 334 344 368
78 82 283 393
7 299 327 334
47 82 117 126
86 100 337 379
299 347 372 375
150 156 299 302
145 252 294 377
155 218 250 392
131 172 250 278
17 64 107 195
26 55 142 181

106 181 327 342
101 103 340 368
44 196 198 280
39 148 192 385
37 130 182 207
57 242 262 316
20 171 259 396
257 288 338 361
12 290 362 367
153 236 304 330
12 144 261 329
33 92 106 173
68 89 159 308
9 23 41 301
109 160 278 387
138 235 241 356
225 256 321 332
32 42 253 275
95 199 219 225
116 328 345 395
128 159 161 207
111 306 363 373
174 256 368 381
18 104 115 317
102 115 140 394
91 96 128 327
97 99 300 385
40 150 229 316
124 315 322 359
21 221 286 301
27 88 147 216
10 124 128 309
57 131 209 296
230 237 264 371
28 118 231 283
5 114 230 309
122 189 204 251
74 151 203 218
69 270 288 359
22 49 291 383
80 90 174 249
182 310 314 318
115 254 336 399
42 63 135 343
46 232 385 391
24 27 171 183
237 293 322 352
81 90 223 363
71 85 128 380
159 309 314 334
17 117 315 379
87 120 206 267
67 116 188 349
63 232 338 365
178 272 327 392
19 35 204 386
194 235 289 345
29 50 154 315

22 47 353 387
0 137 143 167
21 162 195 339
24 225 233 338
177 225 232 281
77 149 241 310
319 325 363 374
77 251 308 379
183 203 290 330
158 246 275 352
78 99 210 238
222 271 380 393
79 107 201 351
66 90 275 287
65 219 247 398
16 203 207 237
101 216 333 357
2 39 326 373
51 151 305 341
6 25 30 130
2 91 146 227
46 141 273 298
157 331 374 385
172 223 237 258
15 93 128 250
94 261 312 341
167 186 202 372
8 29 355 393
36 126 155 373
145 195 227 333
45 206 344 369
8 166 301 397
11 47 141 184
7 112 256 377
108 300 310 312
208 218 364 378
53 114 278 291
131 138 201 365
225 279 371 378
122 275 376 395
169 217 239 357
18 65 128 288
6 62 86 198
37 80 119 211
0 46 139 339
0 30 216 306
82 152 277 367
23 178 350 366
121 212 243 384
257 284 326 382
57 138 311 343
295 318 322 377
78 343 373 377
79 89 131 254
61 74 304 382
30 70 168 253
64 156 306 332
162 197 255 275

33 71 91 112
13 132 247 391
22 208 226 392
56 60 158 164
20 105 120 199
133 232 236 341
90 107 293 370
17 32 254 263
8 173 238 266
30 167 169 391
43 213 328 362
73 231 244 282
71 221 245 253
215 225 258 335
46 87 263 384
81 96 282 338
192 222 306 353
8 115 292 305
36 170 186 260
10 85 212 300
5 129 198 365
19 107 153 308
10 57 98 215
181 211 228 339
62 89 163 295
43 77 113 143
125 149 196 218
83 147 183 279
62 145 180 397
84 280 331 360
114 190 281 359
69 129 168 187
119 144 180 249
7 47 218 308
217 251 269 390
189 200 275 372
157 218 296 363
52 110 151 319
30 131 153 174
28 32 182 198
56 263 316 328
87 168 275 343
24 31 131 148
166 203 208 231
126 170 224 369
20 78 193 213
123 180 253 323
208 229 271 386
1 52 116 383
13 55 71 106
7 306 347 364
145 163 197 228
66 97 212 320
133 176 282 305
22 187 205 372
102 160 180 258
164 197 311 398
75 119 186 254

6 15 65 396
30 108 341 399
217 276 326 347
160 237 274 285
173 248 262 348
52 65 218 351
135 140 253 366
5 81 176 260
58 215 326 364
76 87 102 315
98 131 259 332
15 30 35 55
0 122 269 346
38 162 311 373
143 313 329 340
80 260 316 348
44 158 220 292
117 241 295 363
187 321 355 378
167 226 281 351
0 200 309 384
36 171 193 328
107 178 228 240
80 146 156 375
75 90 290 312
20 55 131 215
99 127 231 344
156 176 301 313
41 146 247 290
49 52 61 76
24 74 310 326
56 196 212 332
76 205 335 385
75 101 209 349
28 172 242 294
18 71 267 297
84 115 233 384
63 139 216 325
23 64 310 348
63 130 188 352
23 45 160 165
42 114 382 399
25 207 339 365
16 334 374 398
86 251 274 277
157 166 297 316
171 200 230 265
34 107 325 364
71 220 227 330
177 263 277 344
75 138 262 293
189 300 366 377
147 175 296 320
2 51 145 208
126 271 310 351
144 197 277 360
28 35 115 289
54 108 270 279

23 82 144 396
78 93 95 275
145 169 211 278
29 163 300 320
33 147 219 391
199 214 265 280
62 133 156 219
31 34 72 115
246 260 267 286
7 266 309 337
24 69 142 394
98 138 228 351
72 181 336 355
12 47 160 172
84 178 230 343
80 238 321 376
170 213 331 367
12 136 274 326
13 51 96 147
23 264 334 346
29 122 183 356
78 287 330 349
42 69 131 198
36 43 189 216
44 142 195 344
40 147 260 330
125 325 379 387
90 111 126 301
113 177 226 273
96 172 181 218
17 124 154 373
87 285 306 376
83 163 173 299
65 87 245 333
161 267 284 293
1 29 54 379
141 170 183 232
5 40 167 238
15 44 95 239
13 75 152 188
216 224 305 331
29 93 197 381
21 222 282 284
175 193 361 372
54 69 298 308
93 169 209 328
39 59 334 391
108 254 340 376
141 246 264 388
96 267 362 392
131 234 291 330
4 168 220 235
130 195 216 367
108 148 290 302
85 214 362 395
48 100 118 346
91 104 355 358
176 342 351 390

6 45 123 126
69 241 268 274
158 324 371 399
62 232 264 373
103 106 146 344
134 268 295 398
120 220 250 354
115 208 355 398
74 190 343 352
258 325 332 371
14 256 347 353
24 33 122 234
98 272 300 342
210 221 268 337
8 94 154 347
195 285 321 327
12 51 54 354
16 41 149 389
55 66 206 297
129 202 214 285
73 96 104 310
55 200 270 318
58 120 150 217
58 279 339 397
60 180 247 308
48 127 213 356
62 128 291 329
26 35 127 323
77 144 286 296
10 47 192 259
122 196 210 329
63 162 235 268
25 45 218 310
67 336 354 393
16 278 347 381
14 39 209 395
21 55 85 304
128 135 194 325
116 159 258 341
125 132 210 219
60 67 150 203
18 60 167 328
55 112 179 381
288 317 324 389
43 320 334 382
5 29 145 281
25 124 232 345
11 119 339 359
5 36 231 316
15 138 354 389
25 82 136 180
20 103 167 266
112 292 359 371
184 201 240 328
77 160 307 339
74 147 280 389
127 149 358 387
50 59 117 185

11 189 212 220
123 135 226 372
83 86 149 386
26 95 121 163
30 54 178 315
136 301 341 365
21 59 265 299
111 154 282 297
6 74 290 349
121 142 174 236
108 129 152 261
152 164 205 377
144 281 332 335
92 244 315 326
66 128 170 221
21 109 174 397
5 154 201 239
80 183 261 293
18 143 335 392
13 139 155 230
145 156 300 327
118 153 171 366
15 152 331 364
161 171 307 317
49 56 127 185
104 168 283 305
199 202 343 399
15 164 192 273
62 199 222 228
67 94 166 256
85 227 250 321
91 121 295 324
3 16 308 340
143 157 307 395
36 77 116 340
3 98 101 125
39 151 364 377
194 227 231 267
59 200 206 389
21 106 287 389
33 268 340 387
140 150 395 398
88 352 360 367
55 91 145 168
126 130 181 323
34 120 227 316
237 337 355 394
34 186 219 313
280 330 340 375
76 230 354 378
5 178 293 297
142 223 234 381
48 239 260 399
58 270 336 360
24 123 271 347
12 76 137 280
107 226 302 367
175 186 208 366
65 183 369 376
60 169 292 350
44 169 240 362
146 187 293 319
198 219 343 380
148 188 256 304
171 189 266 341
94 108 244 288
16 42 200 250
2 64 193 399
129 172 276 379
26 176 234 319
118 135 205 312
115 176 290 359
9 143 188 374
96 186 247 353
30 72 320 388
17 137 186 193
34 229 265 284
129 207 282 287
68 118 275 305
153 172 249 307
106 179 212 378
22 48 105 347
98 137 346 379
41 98 165 232
54 63 99 123
81 213 315 394
38 66 87 191
71 121 294 396
109 200 345 375
33 70 217 266
11 111 210 240
261 271 290 396
190 225 298 369
16 140 227 352
118 183 262 383
17 218 260 350
50 56 278 351
15 36 150 280
18 107 151 176
22 188 244 337
72 186 302 350
65 145 221 239
52 117 331 393
7 37 265 285
56 283 338 382
78 217 337 351
6 247 249 370
1 161 241 255
101 166 183 220
99 198 326 335
105 234 340 384
60 233 242 397
207 215 223 293
233 279 351 380
83 106 188 311
97 185 361 392
14 26 72 304
51 162 194 387
94 245 273 287
26 177 205 314
14 92 385 389
111 211 366 390
27 71 110 327
99 257 359 389
124 295 372 397
12 43 117 356
65 117 136 354
39 67 191 212
80 166 176 358
99 208 353 361
32 46 104 222
4 25 72 203
2 124 130 262
28 113 210 232
66 77 158 268
61 98 202 330
47 67 181 247
51 204 209 307
125 198 289 301
136 214 216 263
97 270 314 338
78 127 215 226
27 242 348 357
94 181 191 363
7 91 93 348
60 193 267 333
185 237 272 381
15 52 166 225
27 100 126 275
70 96 163 333
11 175 273 282
14 212 392 398
91 105 300 382
4 79 232 370
21 75 158 347
331 341 343 386
0 103 163 270
7 95 171 326
16 24 49 133
58 242 363 390
8 236 254 290
50 83 140 370
233 258 340 364
63 289 292 313
231 245 336 342
35 38 246 299
104 246 249 281
161 248 285 325
13 21 192 220
82 89 200 209
8 264 313 368
11 26 242 286
37 248 303 388
64 187 324 392

209 216 230 243
73 241 250 260
181 187 235 239
63 193 300 329
291 332 354 396
19 103 260 383
5 303 328 375
131 237 298 384
103 183 281 286
5 224 263 358
197 199 247 382
18 228 332 344
16 26 57 68
2 158 259 384
128 181 371 398
98 179 247 319
41 71 138 326
175 244 301 317
81 145 226 371
125 202 226 309
115 169 276 298
192 268 296 391
31 167 220 223
39 241 358 382
67 112 159 236
71 180 208 266
59 143 248 394
99 128 223 388
6 192 221 351
129 238 257 378
29 192 252 392
6 110 177 269
29 79 205 241
233 246 325 331
11 211 321 384
144 282 337 386
33 79 327 385
30 110 179 321
86 133 234 284
54 58 72 289
22 145 269 373
81 172 211 381
59 246 252 255
34 113 207 286
69 100 222 231
14 150 387 396
17 73 228 248
29 193 232 259
40 148 359 374
38 281 316 327
70 87 100 395
26 231 295 369
214 234 269 288
77 154 320 365
27 76 86 155
65 139 175 240
33 130 223 286
215 271 317 344
8 47 113 153
194 233 361 377
88 202 284 394
29 118 285 380
96 154 312 383
19 250 318 359
32 282 289 334
56 272 294 303
10 68 72 210
184 261 382 386
202 204 315 342
66 102 195 207
97 243 272 301
92 128 156 304
68 313 385 390
13 32 49 271
4 80 123 277
89 135 243 375
88 372 381 388
66 108 222 274
28 59 164 167
201 204 313 324
73 311 388 397
109 186 243 261
116 125 276 398
58 185 287 293
40 203 279 314
46 50 86 255
23 48 109 120
236 297 325 333
123 155 320 384
36 67 169 274
54 102 191 239
8 109 198 391
143 176 238 370
39 41 105 208
126 197 342 357
9 40 191 384
51 148 207 270
49 114 243 360
60 87 303 370
138 190 248 283
78 97 139 144
177 180 244 272
44 123 243 287
122 211 304 388
70 117 278 332
31 85 343 394
47 133 244 312
20 144 299 368
25 84 335 395
102 199 213 283
64 164 169 224
50 152 224 276
42 184 390 398
1 73 349 396
238 317 354 385
46 70 296 379
156 247 278 334
130 235 319 390
0 108 120 213
11 93 146 235
96 255 374 376
85 146 204 366
146 254 365 391
114 148 151 373
60 121 145 343
112 195 277 296
29 302 310 334
38 156 251 280
130 209 249 266
43 161 250 322
7 168 182 185
15 45 189 286
191 205 301 305
155 235 282 299
40 114 194 372
249 263 323 372
36 214 252 380
176 201 258 373
102 208 340 379
85 161 240 262
5 17 199 339
150 230 306 341
46 123 204 318
71 130 143 271
208 268 365 396
257 263 336 395
218 267 334 360
53 74 255 302
104 175 302 311
228 338 360 369
8 35 112 394
39 130 336 365
13 170 198 378
56 156 162 181
47 95 104 272
9 291 333 362
121 128 193 322
159 276 311 392
15 42 105 267
4 23 202 388
23 61 260 307
42 124 355 380
124 259 374 386
136 140 207 317
9 278 280 325
4 19 59 360
21 79 94 356
26 158 345 353
95 172 261 374
27 119 364 373
35 245 335 374
139 162 184 228
53 84 214 363
17 153 242 386

30 137 274 313
68 169 256 369
30 119 206 394
224 325 365 380
50 178 188 274
2 56 169 225
43 75 167 296
28 131 274 304
107 263 309 385
101 238 310 395
35 58 238 345
43 61 106 391
86 113 161 390
35 316 329 376
37 161 224 306
14 53 98 269
179 207 236 269
10 163 205 369
31 92 162 396
85 268 314 345
1 31 249 319
35 56 281 333
137 199 223 376
52 320 338 362
65 224 307 390
146 310 346 384
101 138 193 307
234 314 342 394
19 109 127 214
40 80 132 196
183 213 229 249
105 228 232 238
64 278 290 357
20 116 173 251
97 261 308 393
20 100 146 165
67 84 164 376
155 260 300 352
116 118 147 233
61 174 328 371
30 60 155 368
39 142 169 232
54 76 318 358
196 341 352 391
61 63 333 350
42 130 307 331
25 190 224 282
57 238 375 393
5 158 186 355
83 110 385 399
48 154 166 308
2 75 288 340
86 223 248 264
67 135 158 350
80 133 345 351
51 195 265 335
63 117 159 196
13 16 37 143
70 95 306 391
178 187 249 316
37 52 162 307
173 211 237 344
41 114 210 233
102 202 287 354
136 185 223 303
86 265 287 355
11 66 131 255
124 147 319 392
46 67 152 380
64 82 111 312
78 123 264 317
24 45 85 295
118 141 244 255
17 164 229 252
27 132 134 179
173 216 220 247
246 306 375 384
75 160 187 263
171 236 329 389
58 178 196 380
171 203 256 370
5 134 277 330
110 153 320 336
24 93 369 383
35 100 244 361
327 345 369 396
27 37 185 277
257 259 321 362
23 253 280 370
13 44 99 224
57 69 114 224
70 154 185 352
34 269 338 367
77 170 234 326
138 171 192 269
173 192 284 371
68 155 164 353
4 22 201 212
206 234 259 270
35 168 176 389
103 162 351 370
49 59 102 212
155 192 270 287
4 81 95 119
135 138 200 301
11 32 294 357
10 73 84 173
25 48 97 145
7 223 280 366
83 137 247 276
31 56 117 325
211 281 307 358
49 118 211 372
70 179 221 371
38 260 266 388
142 222 253 335
83 88 180 363
153 371 374 393
142 161 286 312
34 111 221 243
40 66 91 391
55 120 165 209
4 28 46 292
149 222 244 357
190 339 362 364
10 67 187 338
2 132 168 263
9 63 294 305
26 60 148 224
59 157 188 224
139 220 320 349
69 202 336 385
20 92 313 331
44 79 316 392
104 177 254 335
4 199 234 308
76 139 192 332
1 252 322 331
89 217 352 378
83 156 175 211
75 132 341 364
78 106 204 272
65 159 214 284
141 161 342 353
336 375 381 397
143 260 291 302
84 298 339 375
219 234 357 374
0 118 292 328
19 119 226 387
115 167 294 319
53 222 233 236
18 52 63 182
79 102 148 311
140 270 351 369
91 255 289 389
163 285 330 338
237 251 312 359
39 186 288 301
29 188 211 367
269 298 391 397
85 95 292 307
72 150 266 314
101 199 253 359
18 41 259 368
122 125 185 324
58 294 318 365
84 210 216 235
54 142 147 355
73 91 174 353
15 48 292 323
4 62 67 126
109 129 191 203
143 154 168 205

24 75 127 304
34 142 182 363
10 198 303 308
146 258 273 361
113 132 220 359
39 179 252 274
6 176 199 318
33 55 95 124
134 228 283 329
75 175 339 371
78 89 202 322
85 197 310 390
59 112 305 323
154 163 287 305
83 195 206 264
45 209 255 311
54 182 261 302
128 190 241 384
7 48 66 82
173 315 372 382
41 49 117 320
45 82 120 133
6 42 195 295
171 201 344 377
94 179 205 344
32 144 219 315
226 257 333 386
24 102 182 375
49 86 123 175
62 151 266 298
272 323 339 367
99 160 273 330
194 274 324 368
51 127 158 191
2 98 164 393
90 108 149 315
8 122 129 299
8 48 64 210
56 106 207 240
48 87 212 340
38 231 288 394
137 353 378 393
119 150 272 355
64 92 190 291
4 51 121 215
119 171 229 253
65 357 363 370
83 172 197 280
27 131 360 396
77 136 150 309
3 121 179 230
10 104 152 326
64 134 178 182
214 300 353 386
110 254 268 346
272 304 337 347
37 165 235 262
1 36 234 297
69 281 347 371
59 264 271 348
175 255 277 357
51 97 374 399
108 223 317 360
82 125 216 228
134 154 172 317
49 65 74 157
3 112 266 356
81 204 254 262
3 113 263 332
100 151 205 240
95 125 180 303
234 292 306 352
149 227 349 355
111 142 267 321
27 203 228 361
52 277 309 390
33 57 284 302
35 50 66 219
22 27 149 215
13 28 84 206
59 108 337 349
73 171 273 345
68 140 200 363
38 111 233 358
157 289 328 372
160 188 284 327
137 304 349 374
140 168 204 341
132 223 298 336
71 114 184 200
60 135 323 399
9 38 179 245
114 157 229 366
229 297 323 342
24 36 89 106
101 134 140 381
50 148 194 257
1 222 340 378
67 155 220 365
15 156 210 262
53 125 134 231
192 337 357 360
170 203 216 266
2 71 74 362
40 97 101 356
54 117 145 201
34 81 147 326
5 121 256 311
14 176 272 383
283 297 340 396
7 36 307 320
114 241 271 315
96 179 249 302
7 9 170 394
46 284 308 388
104 158 332 362
109 153 189 370
14 110 338 381
101 142 257 376
93 129 359 394
133 137 142 314
187 215 269 294
116 121 300 363
57 251 267 386
14 126 335 379
31 133 250 268
9 183 241 342
37 164 279 324
118 130 187 270
135 169 182 319
6 149 204 220
63 150 214 259
19 65 348 388
15 46 151 383
22 160 227 230
124 166 279 317
45 130 237 361
6 189 316 347
74 135 142 311
85 153 177 222
120 154 210 237
0 98 291 388
32 259 287 333
184 314 389 397
101 189 296 383
126 160 235 240
111 120 212 288
10 174 209 291
112 114 186 239
164 179 304 346
90 127 252 284
53 173 282 333
82 87 98 354
77 106 138 345
74 329 360 366
167 322 332 395
52 88 276 294
47 199 299 391
3 219 275 297
3 30 375 378
110 134 158 282
151 188 359 388
191 199 304 333
42 191 274 383
51 99 384 394
146 343 367 376
153 247 284 375
36 133 204 243
110 224 265 277
86 129 319 371
103 127 201 336
39 50 247 256
119 165 230 370
21 82 248 311

84 137 239 315
1 155 239 268
265 278 329 342
18 118 234 242
135 189 337 353
18 28 123 159
26 44 88 267
12 50 103 251
144 242 244 372
53 181 221 229
46 89 180 281
3 53 285 382
175 184 205 209
94 208 276 349
14 37 131 266
135 227 367 392
13 59 103 207
48 78 84 243
94 252 262 306
168 316 324 380
196 255 260 394
11 105 178 243
19 122 177 339
64 203 304 319
12 174 194 208
46 52 271 377
62 149 169 353
133 205 239 387
174 206 285 292
14 43 99 137
87 111 371 377
73 137 177 261
10 105 184 352
126 286 347 390
72 91 148 196
12 162 292 363
6 112 273 399
0 1
1 2
2 3
3 4
4 5
5 6
6 7
7 8
8 9
9 10
10 11
11 12
12 13
13 14
14 15
15 16
16 17
17 18
18 19
19 20
20 21
21 22
22 23
23 24
24 25
25 26
26 27
27 28
28 29
29 30
30 31
31 32
32 33
33 34
34 35
35 36
36 37
37 38
38 39
39 40
40 41
41 42
42 43
43 44
44 45
45 46
46 47
47 48
48 49
49 50
50 51
51 52
52 53
53 54
54 55
55 56
56 57
57 58
58 59
59 60
60 61
61 62
62 63
63 64
64 65
65 66
66 67
67 68
68 69
69 70
70 71
71 72
72 73
73 74
74 75
75 76
76 77
77 78
78 79
79 80
80 81
81 82
82 83
83 84
84 85
85 86
86 87
87 88
88 89
89 90
90 91
91 92
92 93
93 94
94 95
95 96
96 97
97 98
98 99
99 100
100 101
101 102
102 103
103 104
104 105
105 106
106 107
107 108
108 109
109 110
110 111
111 112
112 113
113 114
114 115
115 116
116 117
117 118
118 119
119 120
120 121
121 122
122 123
123 124
124 125
125 126
126 127
127 128
128 129
129 130
130 131
131 132
132 133
133 134
134 135
135 136
136 137

137 138
138 139
139 140
140 141
141 142
142 143
143 144
144 145
145 146
146 147
147 148
148 149
149 150
150 151
151 152
152 153
153 154
154 155
155 156
156 157
157 158
158 159
159 160
160 161
161 162
162 163
163 164
164 165
165 166
166 167
167 168
168 169
169 170
170 171
171 172
172 173
173 174
174 175
175 176
176 177
177 178
178 179
179 180
180 181
181 182
182 183
183 184
184 185
185 186
186 187
187 188
188 189
189 190
190 191
191 192
192 193
193 194
194 195
195 196
196 197
197 198
198 199
199 200
200 201
201 202
202 203
203 204
204 205
205 206
206 207
207 208
208 209
209 210
210 211
211 212
212 213
213 214
214 215
215 216
216 217
217 218
218 219
219 220
220 221
221 222
222 223
223 224
224 225
225 226
226 227
227 228
228 229
229 230
230 231
231 232
232 233
233 234
234 235
235 236
236 237
237 238
238 239
239 240
240 241
241 242
242 243
243 244
244 245
245 246
246 247
247 248
248 249
249 250
250 251
251 252
252 253
253 254
254 255
255 256
256 257
257 258
258 259
259 260
260 261
261 262
262 263
263 264
264 265
265 266
266 267
267 268
268 269
269 270
270 271
271 272
272 273
273 274
274 275
275 276
276 277
277 278
278 279
279 280
280 281
281 282
282 283
283 284
284 285
285 286
286 287
287 288
288 289
289 290
290 291
291 292
292 293
293 294
294 295
295 296
296 297
297 298
298 299
299 300
300 301
301 302
302 303
303 304
304 305
305 306
306 307
307 308
308 309
309 310
310 311

311 312
312 313
313 314
314 315
315 316
316 317
317 318
318 319
319 320
320 321
321 322
322 323
323 324
324 325
325 326
326 327
327 328
328 329
329 330
330 331
331 332
332 333
333 334
334 335
335 336
336 337
337 338
338 339
339 340
340 341
341 342
342 343
343 344
344 345
345 346
346 347
347 348
348 349
349 350
350 351
351 352
352 353
353 354
354 355
355 356
356 357
357 358
358 359
359 360
360 361
361 362
362 363
363 364
364 365
365 366
366 367
367 368
368 369
369 370
370 371
371 372
372 373
373 374
374 375
375 376
376 377
377 378
378 379
379 380
380 381
381 382
382 383
383 384
384 385
385 386
386 387
387 388
388 389
389 390
390 391
391 392
392 393
393 394
394 395
395 396
396 397
397 398
398 399
399

What is claimed is:

1. A wireless apparatus comprising:

a forward error correction (FEC) coder to encode digital data using a low density parity check (LDPC) code, said FEC coder including:

a matrix multiplication unit to multiply input data by a transpose of a first portion of a parity check matrix to generate modified data;

a differential encoder to differentially encode said modified data to generate coded data; and

a concatenation unit to concatenate the input data and the coded data to form a code word; and

a wireless transmitter to transmit a wireless signal that includes said code word.

2. The wireless apparatus of claim 1, wherein:

said wireless signal is an orthogonal frequency division multiplexing (OFDM) signal.

3. The wireless apparatus of claim 1, further comprising:

a mapper, between said FEC coder and said wirelews transmitter, to map said code word based on a predetermined modulation scheme; and

an inverse discrete Fourier transform unit to convert mapped data from a frequency domain representation to a time domain representation.

4. The wireless apparatus of claim 1, wherein:

said parity check matrix is substantially as described in the list file of Appendix A.

5. The wireless apparatus of claim 1, wherein:

said parity check matrix is the same as the matrix described in the list file of Appendix A.

6. The wireless apparatus of claim 1, further comprising:

a storage medium to store a representation of at least said first portion of said parity check matrix for use by said matrix multiplication unit.

7. The wireless apparatus of claim 6, wherein:

said storage medium is operative to store a representation of the entire parity check matrix.

8. The wireless apparatus of claim 6, wherein:

said storage medium is operative to store a matrix that is substantially as described in the list file of Appendix A.

9. The wireless apparatus of claim 6, wherein:

said storage medium is operative to store a matrix that is a portion of a matrix that is substantially as described in the list file of Appendix A, said portion of said matrix being a portion having columns of weight 4.

10. The wireless apparatus of claim 1, wherein:

said LDPC code is a (2000, 1600) bit-length code.

11. The wireless apparatus of claim 1, wherein:

said wireless apparatus is a wireless user device for use in a wireless network.

12. The wireless apparatus of claim 1, wherein:

said wireless apparatus is a wireless access point.

13. The wireless apparatus of claim 1, wherein:

said wireless apparatus is a wireless network interface module.

14. The wireless apparatus of claim 1, wherein:

said wireless apparatus is an integrated circuit.

15. A method comprising:

matrix multiplying input data by a transpose of a first portion of a parity check matrix;

processing a result of said matrix multiplication using differential encoding to generate coded data;

concatenating said input data and said coded data to form a code word; and

generating and transmitting a wireless signal that includes said code word.

16. The method of claim 15, wherein:

said wireless signal is an orthogonal frequency division multiplexing (OFDM) signal.

17. The method of claim 15, further comprising:

accessing a storage medium storing a representation of at least a portion of said parity check matrix before matrix multiplying.

18. The method of claim 15, wherein:

said parity check matrix is substantially as described in the list file of Appendix A.

19. The method of claim 15, wherein:

said parity check matrix is the same as the matrix described in the list file of Appendix A.

20. The method of claim 15, wherein:

said parity check matrix defines a (2000, 1600) bit-length LDPC code.

21. The method of claim 15, wherein:

generating and transmitting a wireless signal includes mapping said code word into modulation symbols and processing said modulation symbols using an inverse discrete Fourier transform.

22. An article comprising a machine readable storage medium having a representation of at least a portion of a parity check matrix stored thereon, said parity check matrix being substantially as described in the list file of Appendix A.

23. The article of claim 22, wherein:

said machine readable storage medium has a representation of the entire parity check matrix stored thereon.

24. The article of claim 22, wherein:

said machine readable storage medium has a portion of said parity check matrix stored thereon that includes all columns of weight 4.

25. The article of claim 22, wherein:

said parity check matrix is the same as the matrix described in the list file of Appendix A.

26. The article of claim 22, wherein:

said parity check matrix defines a (2000, 1600) bit-length LDPC code.

27. The article of claim 22, wherein:

said article includes a wireless communication device.

28. The article of claim 22, wherein:

said article comprises only said machine readable storage medium.

29. The article of claim 22, wherein:

said machine readable storage medium comprises at least one of the following: a semiconductor memory, a read only memory (ROM), a random access memory (RAM), an erasable programmable read only memory (EPROM), an electrically erasable programmable read only memory (EEPROM), a flash memory, a magnetic card, an optical card, a magnetic disk, an optical disk, a CD-ROM, and a magneto-optical disk.

30. A system comprising:

a forward error correction (FEC) coder to encode digital data using a low density parity check (LDPC) code, said FEC coder including:

a matrix multiplication unit to multiply input data by a transpose of a first portion of a parity check matrix to generate modified data;

a differential encoder to differentially encode said modified data to generate coded data; and

a concatenation unit to concatenate the input data and the coded data to form a code word;

a wireless transmitter to transmit a wireless signal that includes said code word; and

at least one dipole antenna coupled to said wireless transmitter to facilitate transmission of said wireless signal.

31. The system of claim 30, wherein:

said wireless signal is an orthogonal frequency division multiplexing (OFDM) signal.

32. The system of claim 30, further comprising:

a storage medium to store a representation of at least said first portion of said parity check matrix for use by said matrix multiplication unit.

33. The system of claim 30, wherein:

said parity check matrix is substantially as described in the list file of Appendix A.

34. An article comprising a storage medium having instructions stored thereon that, when executed by a computing platform, operate to:

matrix multiply input data by a transpose of a first portion of a parity check matrix;

process a result of said matrix multiplication using differential encoding to generate coded data;

concatenate said input data and said coded data to form a code word; and

generate and transmit a wireless signal that includes said code word.

35. The article of claim 34, wherein:

said wireless signal is an orthogonal frequency division multiplexing (OFDM) signal.

36. The article of claim 34, wherein said instructions, when executed by the computing platform, further operate to:

access a storage medium having at least a portion of said parity check matrix stored thereon before matrix multiplying.

37. The article of claim 34, wherein:
said parity check matrix is substantially as described in the list file of Appendix A.

38. The article of claim 34, wherein:
said parity check matrix defines a (2000, 1600) bit-length LDPC code.

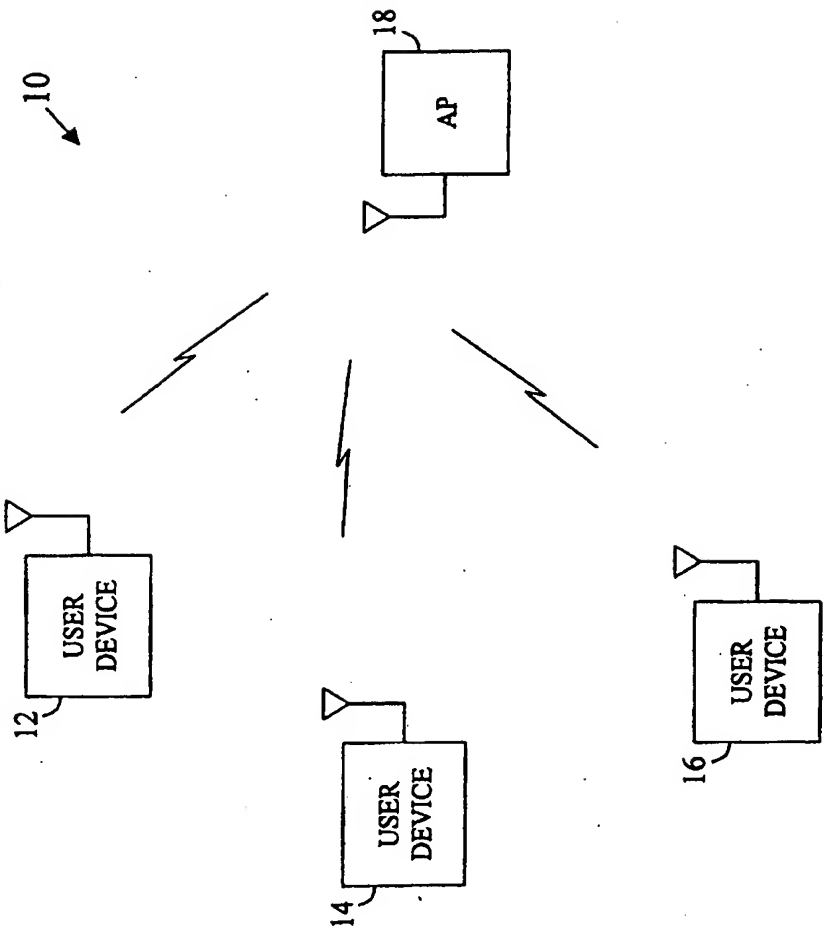

Fig. 1

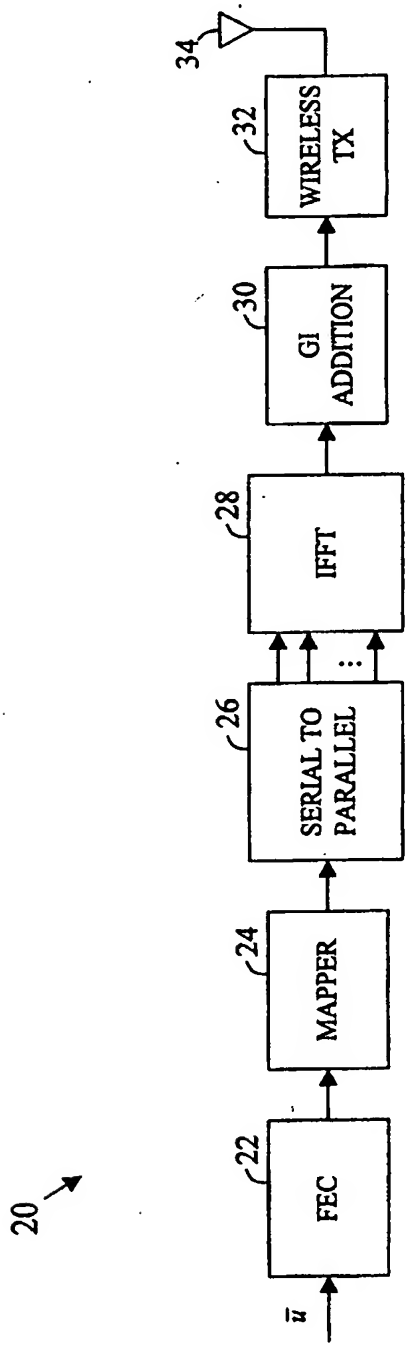
20
22
FEC
24
MAPPER
26
SERIAL TO PARALLEL
28
IFFT
30
GI ADDITION
32
WIRELESS TX
34
u

Fig. 2

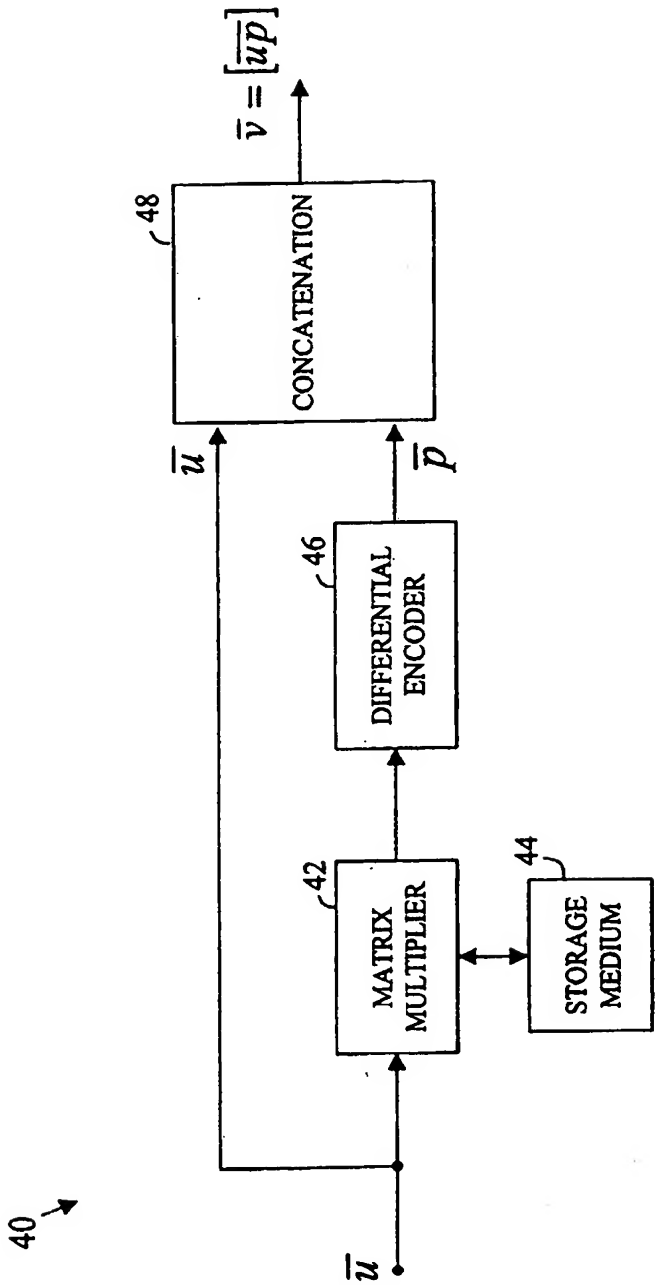
40
$\overline{u}$
MATRIX MULTIPLIER
42
STORAGE MEDIUM
44
DIFFERENTIAL ENCODER
46
$\overline{p}$
$\overline{u}$
CONCATENATION
48
$\overline{v} = [\overline{up}]$

Fig. 3

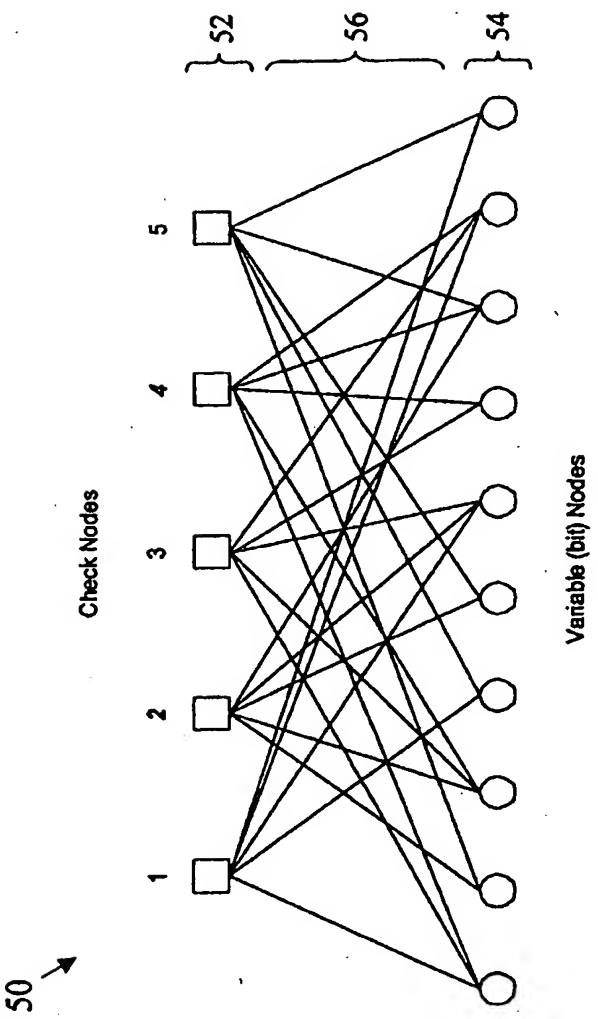

Fig. 4

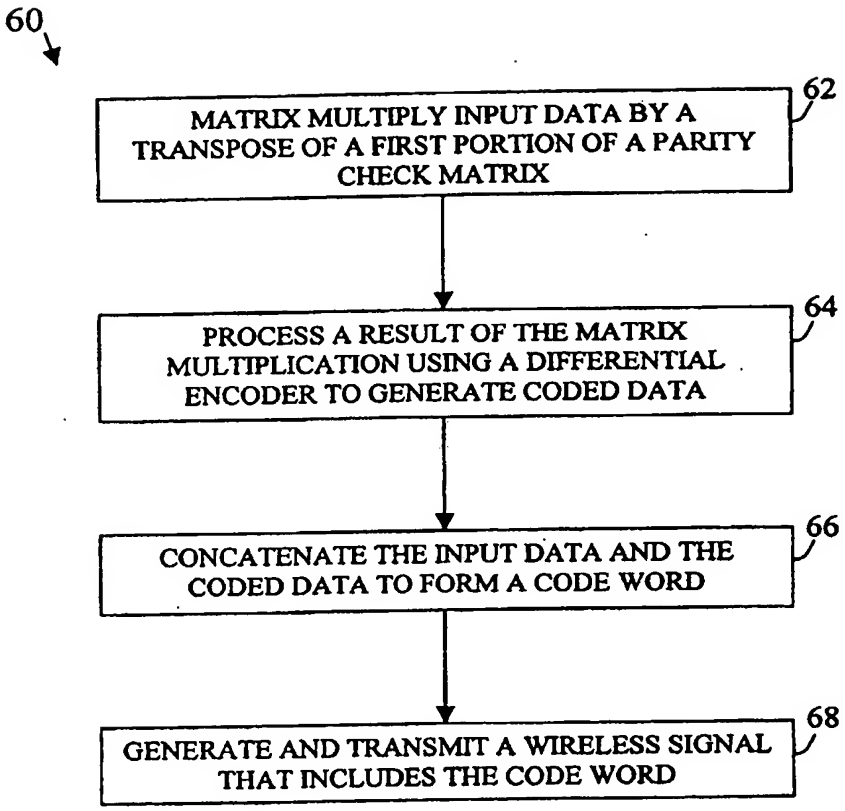
60
MATRIX MULTIPLY INPUT DATA BY A TRANSPOSE OF A FIRST PORTION OF A PARITY CHECK MATRIX
62
PROCESS A RESULT OF THE MATRIX MULTIPLICATION USING A DIFFERENTIAL ENCODER TO GENERATE CODED DATA
64
CONCATENATE THE INPUT DATA AND THE CODED DATA TO FORM A CODE WORD
66
GENERATE AND TRANSMIT A WIRELESS SIGNAL THAT INCLUDES THE CODE WORD
68

Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/000948

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L1/00 H03M13/11

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04L H03M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	YANG M ET AL: "DESIGN OF EFFICIENTLY ENCODABLE MODERATE-LENGTH HIGH-RATE IRREGULAR LDPC CODES" PROCEEDINGS OF THE ANNUAL CONFERENCE ON COMMUNICATION, CONTROL AND COMPUTING, 2 October 2002 (2002-10-02), pages 1415-1424, XP009042018 page 1419 - page 1422; figure 1a -/--	1-21, 30-38

[X] Further documents are listed in the continuation of box C.

[ ] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
19 May 2005	01/06/2005

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Marzenke, M

Form PCT/ISA/210 (second sheet) (January 2004)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/000948

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FUTAKI H ET AL: "Performance of low-density parity-check (LDPC) coded OFDM systems" ICC 2002. 2002 IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS. CONFERENCE PROCEEDINGS. NEW YORK, NY, APRIL 28 - MAY 2, 2002, IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, NEW YORK, NY : IEEE, US, vol. VOL. 1 OF 5, 28 April 2002 (2002-04-28), pages 1696-1700, XP010589776 ISBN: 0-7803-7400-2 page 1696 - page 1698; figure 3	1-21, 30-38
A	SYED M J ET AL: "LDPC-based space-time coded OFDM systems performances over correlated fading channels" COMMUNICATIONS, 2003. APCC 2003. THE 9TH ASIA-PACIFIC CONFERENCE ON 21-24 SEPT. 2003, PISCATAWAY, NJ, USA,IEEE, vol. 2, 21 September 2003 (2003-09-21), pages 590-594, XP010688253 ISBN: 0-7803-8114-9 page 590; figure 1	1-21, 30-38

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2005/000948

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. [X] Claims Nos.: 22-29
because they relate to subject matter not required to be searched by this Authority, namely:

see FURTHER INFORMATION sheet PCT/ISA/210

2. [ ] Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. [ ] Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. [ ] As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. [ ] As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. [ ] As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. [ ] No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

[ ] The additional search fees were accompanied by the applicant's protest.

[ ] No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.1

Claims Nos.: 22-29

Independent Claim 22 relates to an "article" comprising a machine readable storage medium that is merely characterised by the content of the information stored thereon - that is at least a portion of a parity check matrix being substantially as described in Appendix A of present application. Such subject-matter is however excluded from International search according to Rule 39.1(v) PCT (see PCT-Guidelines 9.02 and 9.11).

Any type of machine readable storage medium can be construed from Claim 22, for instance a conventional CD-ROM, a conventional MP3 player or a conventional personal computer (see also Claim 29 listing further possible interpretations). Claim 22 fails to define any structural or functional relationship whatsoever between the stored information and the storage medium. No technical effect can be derived from the fact that the CD-ROM, MP3 player or PC stores information, be it part of a parity check matrix, digitized music or a computer program code.

Consequently, Claim 22 has no technical character as it is solely defined by the content of the stored information (PCT-Guidelines 9.11).

The same applies to the subject-matter of dependent Claims 23-29. Claims 23-26 further specify the information stored in the storage medium and Claim 29 further specifies the type of storage medium used. Again, no technical interaction becomes apparent between the storage medium and the information stored thereon. This problem exists irrespective of whether the claimed "article" comprises only the storage medium (Claim 28) or also a wireless communication device (Claim 27) which does not interact in any way with the storage medium or the information stored.